


HIGH PRESSURE WATER BLASTING GUNS

MECHANICAL ELECTRICAL BYPASS

12.H.11 – 03/2023

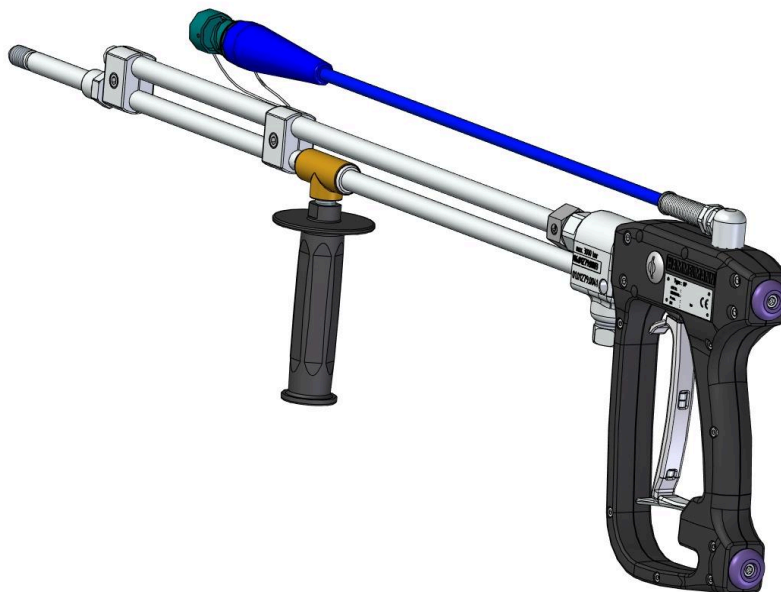

SP 3000 MBE

- Hand grip made of high impact resistant plastic.
- Front hand grip, swivel position adjustable.
- Forged stainless steel valve housing.
- Safety catch in safety lever.
- With the safety lever over 80 % less strength is required to operate and hold the trigger compared to conventional guns.
- Bypass functions operated by the trigger directly at the gun.
- Low maintenance seal cassette.
- Built-in Reed switch, for intrinsically safe circuit Ex (i) 24 Volt control signal.

TECHNICAL DATA SP 3000 MBE

Operating pressure max.:	3000 bar
Flow rate at Δp 5 bar max.:	30 l/min

<u>Connection thread</u>	
Pressure screw:	M26 x 1.5 male
Pressure ring:	M14 x 1.5 LH female

Length (750 mm lance):	990 mm
Connection thread (lance):	M14 x 1.5 LH
Weight (750 mm lance):	4.1 kg

Type	Length of lance	Code no.
SP 3000 MBE	750 mm	00.03141.0065
	1000 mm	00.03141.0072
	1300 mm	00.03141.0073

ACCESSORY (optional)	Code no.
SPLASH PROTECTION for the above models Weight: 0.210 kg	00.04877.0017



If the reaction force is over 150 N (up to max. 250 N) then the jetting tool must be fitted with a support device such as a shoulder stock!

HAMMELMANN®